





Maximum Horizontal Length
SF75 = 60m - SF90 = 40m - SF125 = 30m

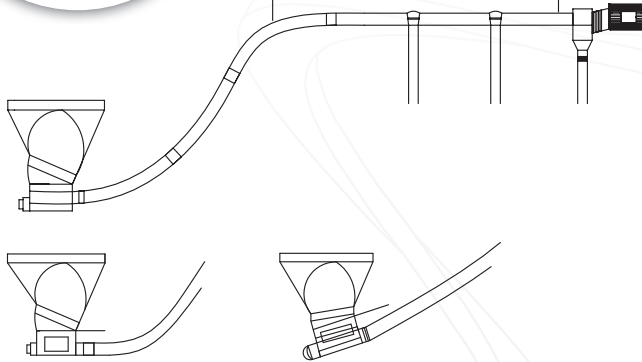

Horizontal boot recommended!

Capacity with horizontal boot

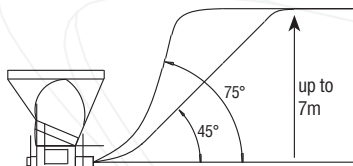

INCLINED	MASH	PELLETS
No Elbows	100%	100%
45°	90%	80%
75°	80%	70%

Specification of siloflex® Augers by Saglamis:

- Hardness 41 to 44 HRc
- Feed Distribution Capacity: 1.300 - 4.500kg/hour
- Bending Radius: 1,5m
- Maximum inclination 75°
- Motor Power: 0,75 – 1,1 kW
- Customized Coil size as per customer request.
- Efficient transport of different feed types (pellets, mash, etc...)
- Uniform distribution of mash
- 2% or less breakage of pellet

siloflex®

Article No.	Outside Diameter	Inside Diameter	Pitch Size	Flat Wire Width	Flat Wire Thickness	Pipe Outside Diameter (mm)
SF75.001	57,50 mm	36,50 mm	60,00 mm	10,50 mm	3,80 mm	Ø 75mm TUBE
SF75.002	60,00 mm	39,00 mm	52,00 mm	10,50 mm	3,80 mm	
SF75.003	65,50 mm	44,50 mm	52,00 mm	10,50 mm	3,80 mm	
SF75.004	49,00 mm	28,00 mm	40,00 mm	10,50 mm	4,00 mm	
SF75.005	54,00 mm	33,00 mm	36,00 mm	10,50 mm	4,00 mm	
SF75.006	57,00 mm	36,00 mm	40,00 mm	10,50 mm	4,00 mm	
SF75.007	63,00 mm	42,00 mm	52,00 mm	10,50 mm	4,00 mm	
SF75.008	58,40 mm	34,40 mm	46,00 mm	12,00 mm	4,00 mm	
SF75.009	60,50 mm	36,50 mm	40,00 mm	12,00 mm	4,00 mm	
SF75.010	60,50 mm	36,50 mm	60,00 mm	12,00 mm	4,00 mm	
SF75.011	60,58 mm	36,58 mm	41,40 mm	12,00 mm	4,00 mm	
SF75.012	61,20 mm	37,20 mm	41,30 mm	12,00 mm	4,00 mm	
SF75.013	63,30 mm	39,30 mm	40,00 mm	12,00 mm	4,00 mm	
SF90.001	68,00 mm	47,00 mm	52,00 mm	10,50 mm	3,80 mm	Ø 90mm TUBE
SF90.002	75,00 mm	54,00 mm	52,00 mm	10,50 mm	3,80 mm	
SF90.003	68,45 mm	44,45 mm	54,10 mm	12,00 mm	4,00 mm	
SF90.004	68,50 mm	44,50 mm	50,00 mm	12,00 mm	4,00 mm	
SF90.005	69,00 mm	45,00 mm	52,00 mm	12,00 mm	4,00 mm	
SF90.006	69,00 mm	45,00 mm	50,00 mm	12,00 mm	4,00 mm	
SF90.007	70,00 mm	46,00 mm	56,00 mm	12,00 mm	4,00 mm	
SF90.008	70,50 mm	46,50 mm	50,00 mm	12,00 mm	4,00 mm	
SF90.009	70,50 mm	46,50 mm	65,00 mm	12,00 mm	4,00 mm	
SF90.010	71,00 mm	47,00 mm	58,00 mm	12,00 mm	4,00 mm	
SF90.011	72,30 mm	48,30 mm	50,00 mm	12,00 mm	4,00 mm	
SF90.012	74,50 mm	46,50 mm	50,00 mm	14,00 mm	4,00 mm	
SF125.001	90,00 mm	62,00 mm	52,00 mm	14,00 mm	4,00 mm	Ø 125mm TUBE
SF125.002	92,00 mm	64,00 mm	62,00 mm	14,00 mm	4,00 mm	
SF125.003	100,00 mm	72,00 mm	52,00 mm	14,00 mm	4,00 mm	
SF125.004	100,00 mm	72,00 mm	66,00 mm	14,00 mm	4,00 mm	



feederflex®

Sales Office
Çelikiş Çelik Tel ve Tel Ürünleri Tic. San. Ltd. Şti.
Girne Mah. Irmak Sk. Küçükyalı İş Merkezi
A Blok No:4 Maltepe - İstanbul / TÜRKİYE
Tel : +90(216) 361 68 48 Fax : +90(216) 361 47 28

Factory
Sağlamiş Çelik Tel ve Mamülleri San. Tic. A.Ş.
1. Organize Sanayi Bölgesi 1. Yol No:30
Arifiye, 54580 Sakarya / TÜRKİYE
Tel : +90(264) 276 93 93 Fax: +90(264) 276 93 94

www.feederflex.com - info@feederflex.com